

ELECTRIC FURNACES

ENJOY FULL CONTROL
OF YOUR COMFORT



**MADE IN
CANADA**

WHY CHOOSE CONFORTO'S ELECTRIC HEATING PRODUCTS?

In addition to Conforto's renowned expertise, there are many additional significant advantages.



Guaranteed Comfort

Modulation function
maintaining desired ambient
temperature at all times.



Versatility

Full range of models and
heating capacities available.



Peace of mind

Conforto provides a 5-year
parts warranty. Industry leading
fully redundant safety controls.



Advanced technology

Software defined electronic
controls compatible with
today's smart thermostats.
Readily adaptable to several
configurations of heating
and / or air conditioning.



Optimized energy consumption

Our furnaces have functions
minimizing their electricity
consumption, which means
savings for the consumer.



Low environmental footprint

Electricity is a renewable
source of energy and safe
for the environment.



What sets us apart

COMFORTMAX FEATURE

Our ComfortMax system is intelligent, which means it analyzes every heating cycle in real time and adapts its heating output accordingly.

What does that change?

- Ensures a more linear ambient temperature at all times and prevents undesired temperature swings.
- Reduces the amount of energy consumed by the appliance.
- Eliminates short cycling which increases the durability and long term reliability of the electric components.

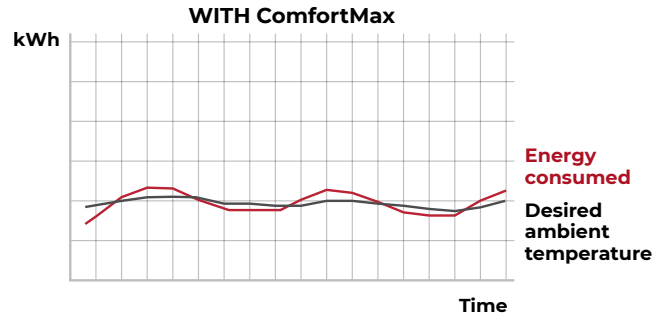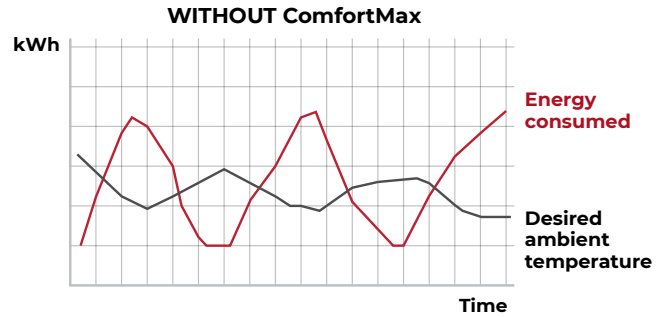

QuietComfort functionality



WITHOUT QuietComfort

WITH QuietComfort

- Warmer than desired temperature
- Desired temperature
- Cooler than desired temperature

EXCLUSIVE AT CONFORTO

When activated, the QuietComfort feature allows continuous recirculating air from the furnace to be preheated at low energy. The function is automatically deactivated at night (when night temperature setback is activated) and reactivated automatically when heat demand is required.

What does that change?

- Provides more even ambient temperature between the different floors and rooms in the home during continuous air circulation.
- Procurs greater comfort.



Simple and easy to combine to add-on central heat pump or air conditioning systems.




Appliance internal cabinet is insulated offering added benefits

- Provides a quieter operation.
- Allows for the safe installation of heating/cooling coil in the return air duct to the furnace in order to optimize its performance and offer greater comfort and savings.

Allowing you to keep control of your comfort is our commitment!

Field programmable DIP switches: allows the installer to configure the furnace for specific applications.

Heavy duty relays: for greater durability and reliability.

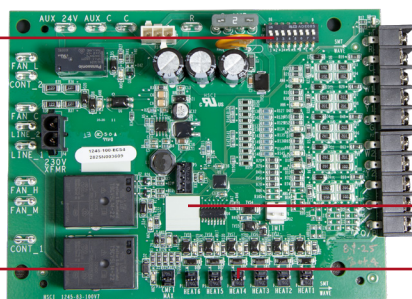

Internal CPU: powerful and versatile thanks to its software definable firmware.

Each heating element has its own circuit.


Electronic control board

- Control board connections for either single or 2 stage heat/cool thermostats. Can be connected to standard or electronic power steering smart thermostats.
- LED diagnostic and operational system indicator lights for easy commissioning.
- Advanced heating element staging ensures only the necessary amount of heating is supplied to the home. Lowers energy costs without sacrificing your comfort.
- 24Vac (4 VA) rated connection available to accommodate HVAC accessories such as a central humidifier.
- The furnace is compatible with both heat pumps and air conditioning systems and allows the installer to select the coil location (supply or return) side of the furnace. This optimizes system operation.
- Fully redundant separate high temperature limit switches, voltage surge protection, voltage brown out protection, and replaceable fused control board offer enhanced safety and protection.


Designed for easy installation and maintenance

All connections, maintenance and access to components is available from the front of the furnace. Installation with zero clearance to combustible materials and floors.

LOWBOY WITH CENTRAL HEAT PUMP OR AIR CONDITIONER COIL

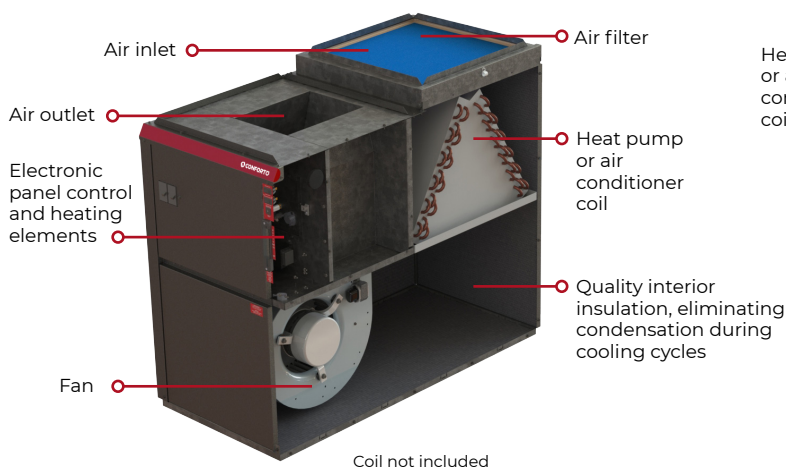

HIBOY MULTIPOSITION MULTIPOSITION WITH CENTRAL HEAT PUMP OR AIR CONDITIONER COIL

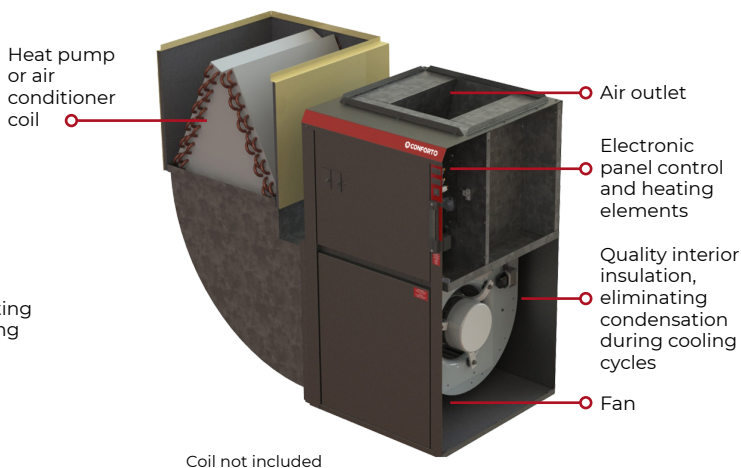

Easier and more cost effective design when converting existing LOWBOY oil furnaces. The LOWBOY model adapts very easily to the existing ventilation ducts of the oil furnace in place.

Allows an installation with a smaller footprint or multiposition installation, upflow, downflow, horizontal right.

Which configuration best suits you?

Conforto electric furnaces are available in 2 configurations:
Hiboy Multiposition (KHE) and Lowboy (KLE).

KHE model:

- Automatic heat output modulation, ensuring a more linear ambient temperature without big temperature fluctuations.
- Efficient even in very cold weather.
- Easy installation and connections.
- Safe technology requiring little maintenance.
- Available with a PSC or ECM* fan blower motor (the most affordable and the least restrictive ECM blower motor option available on the market), both PSC and ECM blower motors are compatible with the same Granby standard electronic control.

KLE model:

- Has all the advantages of the KHE model.
- Simplified installation when replacing a Lowboy oil-fired appliance.



**Renowned for their low electricity consumption and their increased life expectancy. Does not require a dedicated fan motor or proprietary electronic control. Are also eligible for certain government grants, check with your local, provincial or state authorities.*

GENERAL INFORMATION

	KHE	KLE
Dimensions (LxWxH)	20" x 21" x 36 ¼"	21 ½" x 44" x 34 ½"
Supply Air Plenum	18" x 15"	20" x 20"
Return Air Plenum*	18 ½" x 18 ½"	18 ½" x 18 ½"
Air Filter (1 included)	20" x 20" x 1"	20" x 20" x 1"
Shipping Weight	48 KG (105 lbs)	50 KG (110 lbs)

Models	KHE & KLE					
Output Power (KWH)	10	15	18	20	23	27
Output Power (Btuh)	34 140	51 216	61 460	68 288	78 530	92 190
Air-Conditioning Capacity	3.0T	3.0T	3.0T	3.0T	3.0T	5.0T
Temperature Rise (F°)	30-45	45-60	55-75	60-80	65-80	50-80
Total Amps.	42	62	82	91	94	114
Volts (V/Hz/Ph)	240/60/1	240/60/1	240/60/1	240/60/1	240/60/1	240/60/1
PSC Blower Motor	240V 1/3 HP 3 speeds	240V 1/3 HP 3 speeds	240V 1/3 HP 3 speeds	240V 1/3 HP 3 speeds	240V 1/3 HP 3 speeds	240V 3/4 HP 4 speeds
ECM Blower Motor	240V 1/2 HP 5 speeds	240V 1/2 HP 5 speeds	240V 1/2 HP 5 speeds	240V 1/2 HP 5 speeds	240V 1/2 HP 5 speeds	240V 3/4 HP 5 speeds

*Furnace opening 20" x 20"



confortohvac.com

